



**IMPORTANT: PLEASE RETURN THIS SHEET TO ITS ORIGINAL LOCATION.**

PERFORMANCE DATA NO LOAD & NO DOOR OPENINGS AT MID-POINT CONTROL SETTING		
Type A with Run/Start Capacitor	65°F (18°C) Ambient	90°F (32°C) Ambient
Operating Time	N/A	14 to 37%
Wine Cooler Temperature	45° F to 65° F	45° F to 65° F
Low Side Pressure (cut-in)	30 to 45 psig 208 to 310 kPa	30 to 45 psig 208 to 310 kPa
Low Side Pressure (cut-out)	-2 to 4 psig -14 to 28 kPa	-2 to 4 psig -14 to 28 kPa
High Side Pressure (last 1/3 cycle)	90 to 120 psig 621 to 827 kPa	130 to 175 psig 896 to 1207 kPa
Wattage (last 1/3 cycle)	85 to 125	85 to 125
Amps (running)	.75 to 1.2	.75 to 1.2
Base Voltage	115 vac (127 vac max)	
CONDENSER FAN MOTOR		
Watts	RPM	Amps
2.3	1100 CW Opposite Shaft	0.15 Running
WINE COOLER EVAPORATOR FAN MOTOR (Quantity 2)		
2.76 each	1800	.23 each


**SERVICE DATA SHEET**  
**241995900**  
**WINE COOLER - R134a**

**CAUTION**  
All electrical parts and wiring must be shielded from torch flame. **DO NOT** allow torch to touch insulation; it will char at 200°F and flash ignite (burn) at 500°F. Excessive heat will distort the plastic liner.



**NOTE**  
Your Electrolux wine keeper has been designed for either free-standing or built-in installation. When built-in, your wine keeper does not require additional air space for top, sides or rear. In either case, the front grille must **NOT** be obstructed.  
  
To ease unit installation and removal, it is recommended that the cabinet rough opening dimensions be increased by at least ¼ inch over the dimensions given for your unit.  
  
All units require zero clearance when installed flush with a cabinet or wall. Electrolux stainless steel models require a 3” minimum handle clearance when installed against a wall or cabinet that extends beyond the front edge of the unit.

**IMPORTANT SAFETY NOTE**  
The information provided herein is designed to assist qualified repair personnel only. Untrained persons should not attempt to make repairs due to the possibility of electrical shock. Disconnect power cord before servicing this appliance.  
  
**IMPORTANT**  
If any green grounding wires are removed during servicing, they must be returned to their original position and properly secured.

Width	Height	Depth
23 ½ inch	75-76 inches	24 ⅞ inch

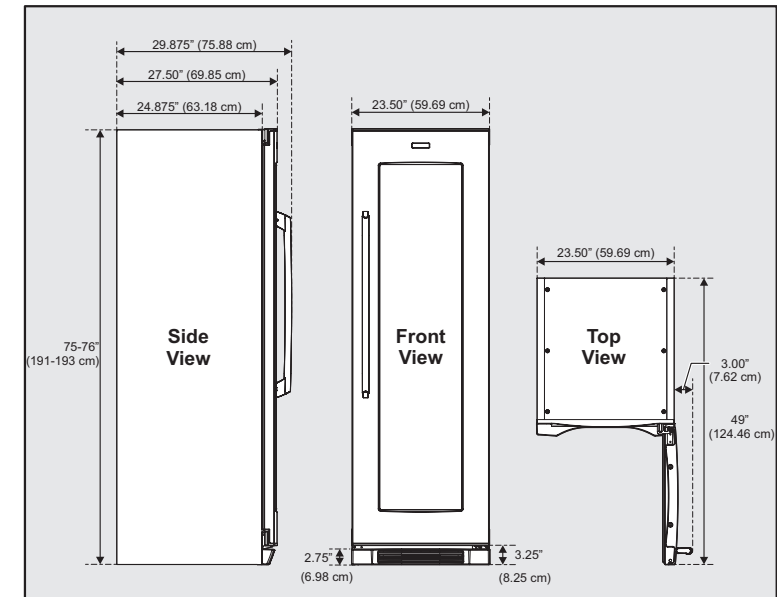

**Unit Dimensions**

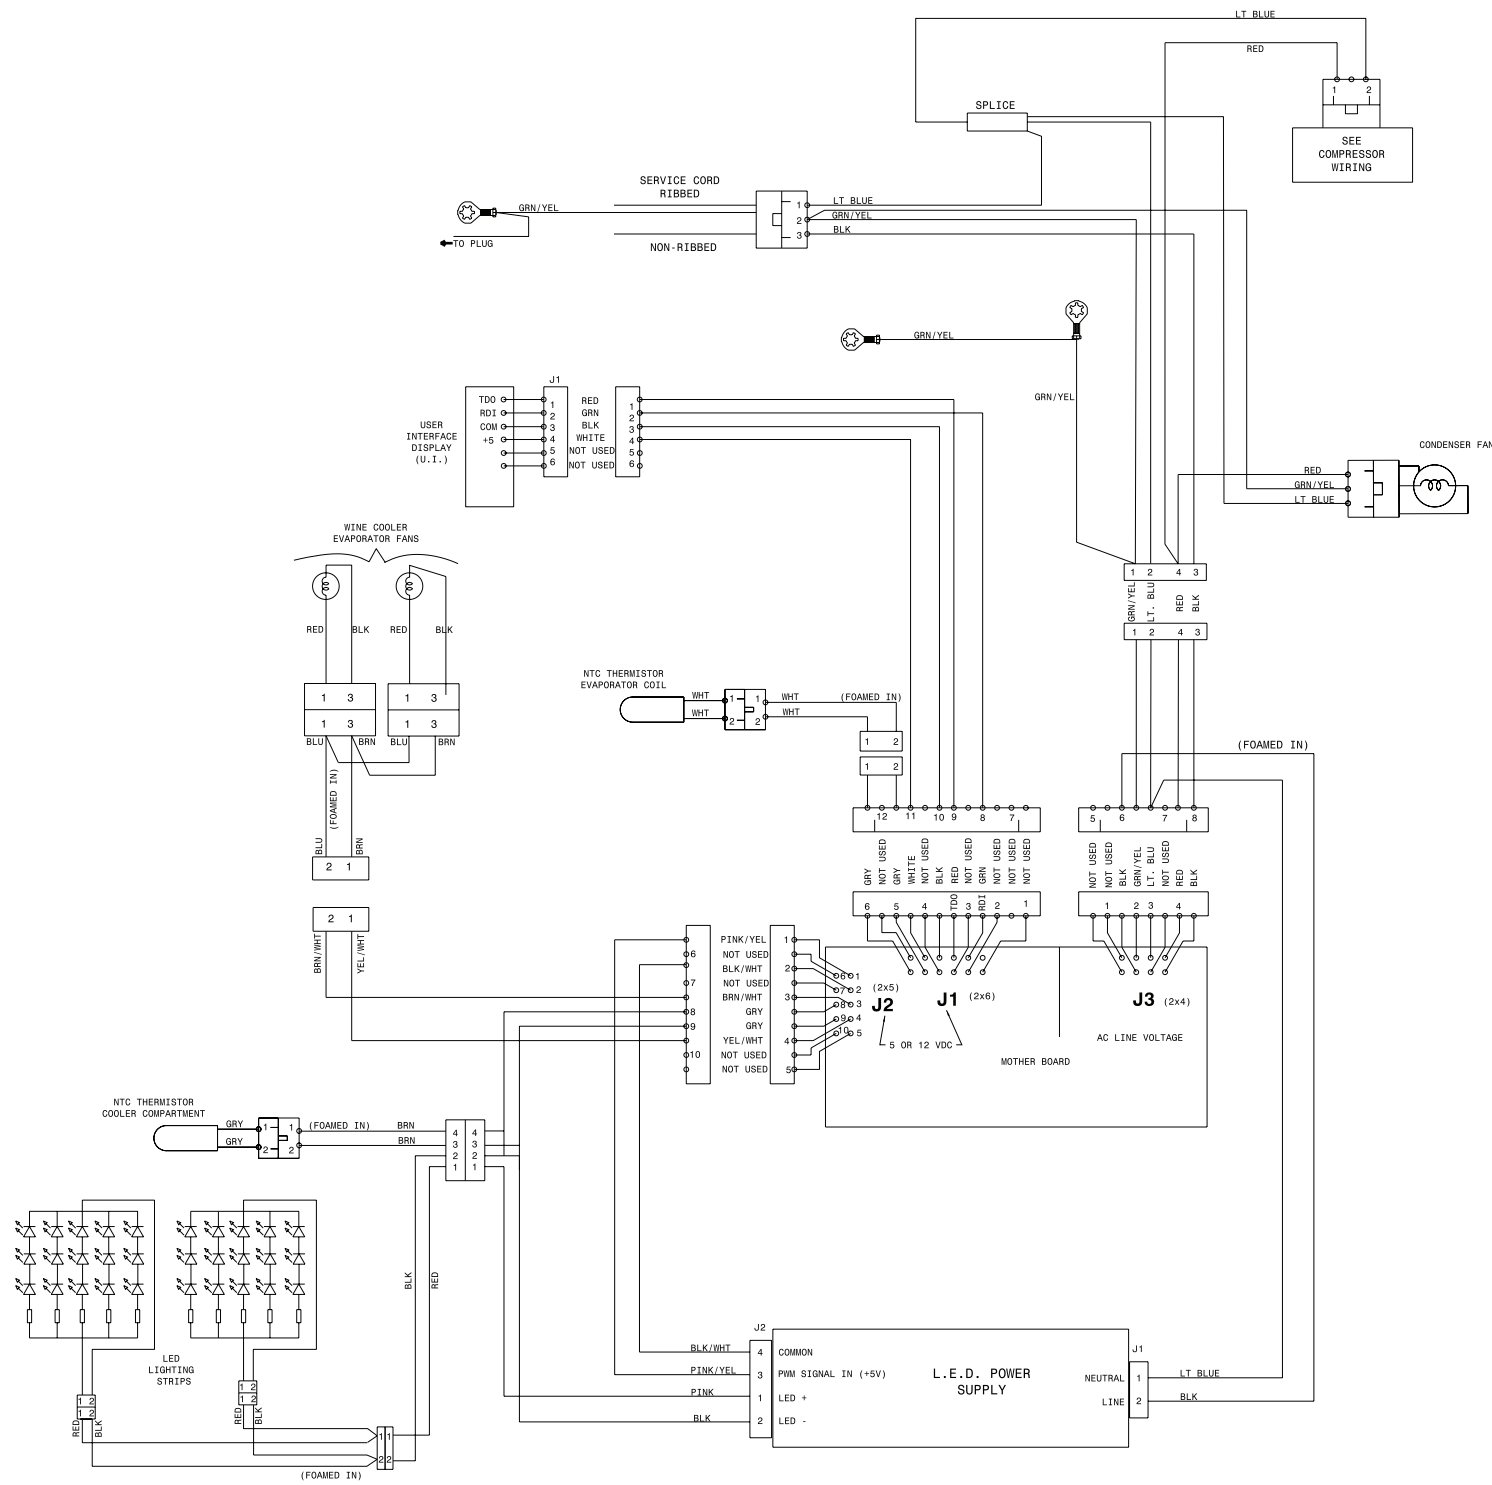

\*CAPACITOR IS ONLY USED WITH SOME P.T.C. MODELS  
 STANDARD AC COMPRESSOR

