



Personal Valet™
Clothes Vitalizing System



PRODUCT MODEL NUMBERS

PVBN600	PVWC600
PVBC600	PVWN600
PVBM600	PVWM600
PVBS600	PVWS600
PVFE600	

Electrical: 120-volt, 60-Hz, AC-only, 15- or 20-amp. electrical supply. Use copper wire only. A time-delay fuse or circuit breaker and separate circuit is recommended.

For wood or metal studded wall installations, there **must** be 2 studs in the mounting area.

OVERALL DIMENSIONS

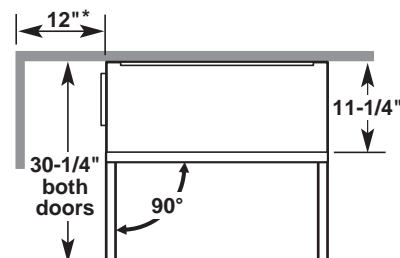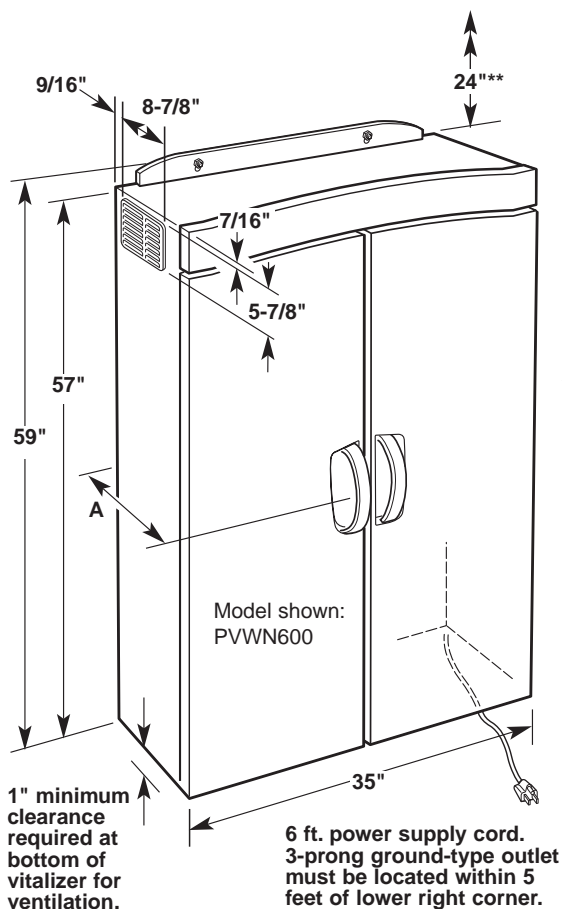


* 12" minimum clearance to side wall on left side of appliance is required for air venting.

** 24" minimum clearance to ceiling or any non-removable object (cabinet, soffit, shelf, etc.) above vitalizer is required for serviceability.

for all models except PVFE600	weight	overall depth (incl. handle) A	panel dimensions
white doors	117 lbs.	15-1/4"	—
biscuit doors	117 lbs.	15-1/4"	—
wood panel doors	137 lbs.	15-1/8"	17-1/16" x 52-13/16" x 1/4" thick
mirrored doors	143 lbs.	15-1/8"	

CUSTOM PANELS

For models
PVFE600,
PVWC600,
PVWS600,
PVBC600,
PVBS600:

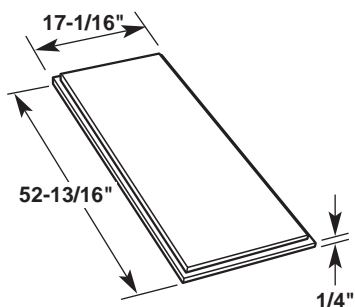

Cut door panel as shown. If the desired panel is greater than 1/4" thick, rout a 1/4" thick edge, in 1/4" from all four edges.