


TERM. C A M	CIRCUIT	DELAYED START					REGULAR CYCLE					OFF		DELICATE & HAND WASH CYCLE			OFF		ECO-WASH			OFF									
		6 HR	6 HR	4 HR	2 HR	1 HR	HEAVY WASH	NORMAL WASH	QUICK WASH	RINSES & SPINS		FINAL SPIN			FINAL SPIN			6 HR	4 HR	2 HR	WASH	FINAL SPIN									
0 0	T																														
	B																														
0 2	T																														
	B																														
1 23	T																														
	B																														
2 5	T																														
	B																														
3 23	T																														
	B																														
4 5	T																														
	B																														
5 23	T																														
	B																														
6 11	T																														
	B																														
7 23	T																														
	B																														
8 14	T																														
	B																														
9 23	T																														
	B																														
10 17	T																														
	B																														
11 23	T																														
	B																														
12 20	T																														
	B																														
13 5	T																														
	B																														
14 19	T																														
	B																														


STEP TIME (MIN.)	STEP NO.
1	1
19	1
19	1
5	1
9	1
9	1
10	1
3	3
1.8	1.8
6.7	6.7
5.9	5.9
6.8	6.8
15	15
2	2
5.9	5.9
2.5	2.5
3	3
0.8	0.8
1.8	1.8
2.7	2.7
1.8	1.8
10.4	10.4
2.5	2.5
10.2	10.2
0.8	0.8
30	30
2.7	2.7
1.8	1.8
1	1
1.8	1.8
8.4	8.4
3.8	3.8
2.5	2.5
19	19
1	1
19	19
10	10
1	1
6.2	6.2
5.9	5.9
2.5	2.5
5.9	5.9
2.5	2.5
5.9	5.9
2.5	2.5
30	30
2.7	2.7
1.8	1.8
10.8	10.8
2.5	2.5
55	55

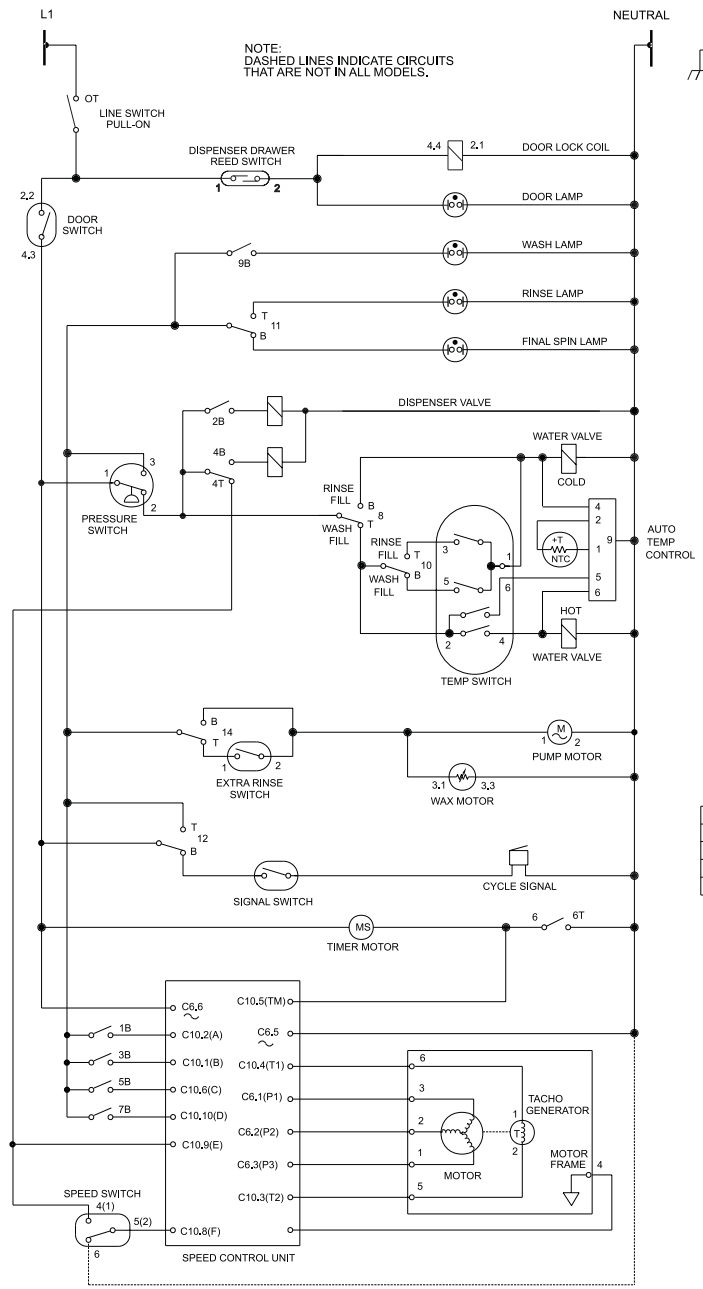

COMPONENT RESISTANCE TABLE	
ELECTRICAL COMPONENT	RESISTANCE Ω @ 77°F (25 @ 77°C)
WATER VALVE SOLENOIDS	880 \pm 10%
DOOR LOCK SOLENOID	380 \pm 10%
TIMER MOTOR	2425 \pm 6%
PUMP MOTOR	15 \pm 7%
DISPENSER VALVE SOLENOIDS	1100 \pm 7%
MOTOR	M1 TO M2 2.6 \pm 7%
	M2 TO M3 2.6 \pm 7%
	M1 TO M3 2.6 \pm 7%
	M5 TO M6 184 \pm 7%

TEMPERATURE SWITCH				
WASH/ RINSE	CIRCUIT			
	1-3	1-5	2-6	2-4
H/C				X
+ W/C		X		X
+ C/C		X	X	
+ W/W	X	X		X
REG C/C		X	X	
REG W/C			X	X
REG W/W	X		X	X

H=HOT W=WARM C=COLD
REG=REGULATED X=CLOSED
* NOT ON ALL MODELS




WIRING CODES	
\bullet	CONNECTION
\vdash	NO CONNECTION
---	CABINET GROUND
∇	LOCAL GROUND



SPEED SWITCH	
CIRCUIT	5-6 4(1)-5(2)
* SLOW	X
NORMAL	X
FAST	

X = CONTACTS CLOSED
* NOT ON ALL MODELS

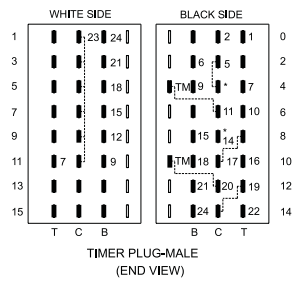

WARNING TO REDUCE THE RISK OF ELECTRICAL SHOCK DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY BEFORE ATTEMPTING ANY USER MAINTENANCE. TURNING THE CONTROLS TO THE OFF POSITION DOES NOT DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY.