


AE1RD20DM

Ductless Split System Heat Pump (Indoor Component)

Dimensions and Installation Information (in inches)

Optional Tube Kits

	20,000 BTU	
	TUE1662	TUE3262
Insulated Tubing	16'	32'
Wall Hole Sleeves (2)	Included	Included
Suction Line	0.625"	0.625"
Liquid Line	0.375"	0.375"

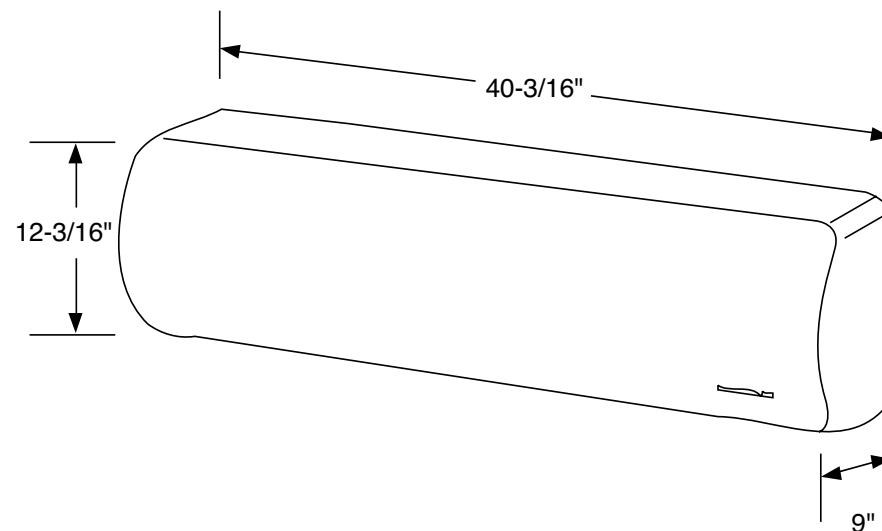

Note: For any service which requires entry into the refrigerant sealed system, Federal regulations require that the work be performed by a technician having a Class II or Universal certification.

For answers to your Monogram,[®] GE Profile[™] or GE[®] appliance questions, visit our website at ge.com or call GE Answer Center[®] service, 800.626.2000.



imagination at work



Total capacity and E.E.R. ratings are calculated based on the Association of Home Appliance Manufacturers' standards.



Listed by Underwriters Laboratories

AE1RD20DM

Ductless Split System Heat Pump (Indoor Component)

Features and Benefits

- 19,250 BTU/hr cooling,
20,200 BTU/hr heating
- R-410A Refrigerant
- Inverter Compressor Technology
- Auto/Cool/Fan/Dehumidify/Sleep/Timer/Circulaire™ Modes
- Full-Function Wireless Remote
- Uses 16' or 32' Tubing Kits
- Model AE1RD20DM - Indoor component
- Model AE0RD20DM - Outdoor component



For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.



imagination at work