



WARNING TO REDUCE THE RISK OF ELECTRICAL SHOCK DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY BEFORE ATTEMPTING ANY USER MAINTENANCE. TURNING THE CONTROLS TO THE OFF POSITION DOES NOT DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY.

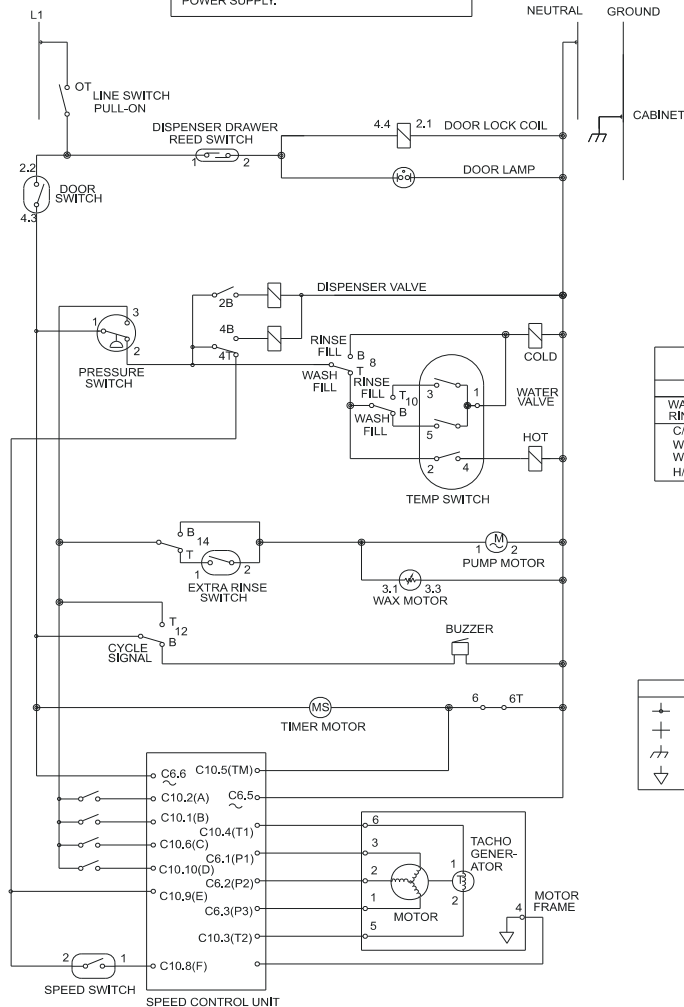

COMPONENT RESISTANCE TABLE	
ELECTRICAL COMPONENT	RESISTANCE Ω @ 77°F(25 @ 77°C)
WATER VALVE SOLENOIDS	880 ±10%
DOOR LOCK SOLENOID	380 ±10%
TIMER MOTOR	2425 ±6%
PUMP MOTOR	15 ±7%
DISPENSER VALVE SOLENOIDS	1100 ±7%
MOTOR	
M1 TO M2	2.6 ±7%
M2 TO M3	2.6 ±7%
M1 TO M3	2.6 ±7%
M5 TO M6	184 ±7%


TEMPERATURE SWITCH			
CIRCUIT			
WASH/RINSE	1-3	1-5	2-4
C/C		X	X
W/C	X	X	X
W/W	X	X	X
H/C			X



MOTOR PLUG-MALE (END VIEW)

NO LOAD, START POSITION OF PERMANENT PRESS

WIRING CODES	
+	CONNECTION
+	NO CONNECTION
⊥	CABINET GROUND
⊥	LOCAL GROUND



TIMER PLUG-MALE (END VIEW)

WIRING DIAGRAM P/N 131854600